

TopCon

Bi-Facial
565Wp-650Wp



Glass
To
Glass



30 Years
Performance
Warranty



12 Years
Manufacturing
Warranty

5 GW

Manufacturing
Facility



Approved List of Models and Manufacturers



Best in class
thermal coefficients



Sustain heavy
snow & wind loads



Highest
commercial
gains



Split junction
box improve
heat dissipation



Increase
shade
tolerance



Highest
reliability


TopCon Series N-type Bifacial Module

585w Bi-Facial | 144 Cell

Technical Specifications




Specifications	ECE144T585
Power (Pm) in Watts (nominal)	585±2%
Open Circuit Voltage (Voc) in Volts	51.70
Short Circuit Current (Isc) in Amps	13.82
Voltage at Max Power (Vmp) in Volts	44.86
Current at Max Power (Imp) in Amps	13.09
Module Fill Factor (%)	82.17
Module Efficiency (%)	22.65%
Maximum System Voltage (Vdc)	150 0V
Solar Cells per Module (Units)	72 TopCon - 144 Half Cut Cells
Max Series Fuse Rating in Amps	30
Normal Operating Temperature	42±2°

* All electrical parameters specified at STC: 25° C cell temperature; 1000W / M² irradiance; AM 1.5

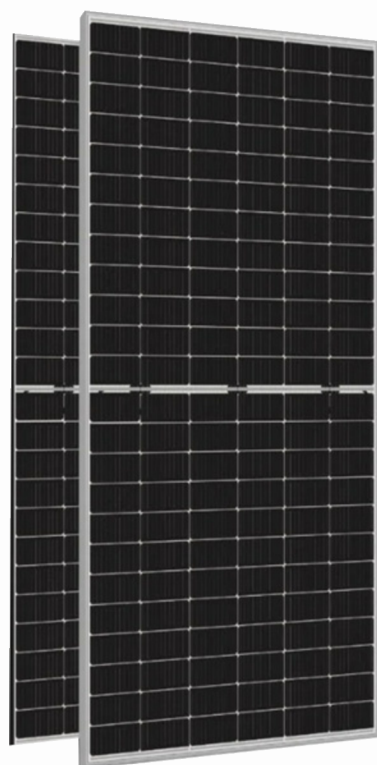


Mechanical Details

Solar Cells Type	Half cut TopCon
Solar Glass	3.2 mm ARC Glass
Length (L)x Width(W) x Height(T)	2278mm x 1134mm x 35mm
Area	2.58 Sqm
Mounting Hole Pitch (Y)	Y1= 1500mm, Y2=1000mm
Mounting Hole Pitch (X)	1093 + 2 mm
Mounting hole size	12mm*8mm(± 2 mm)
Weight	≈ 28.50Kg
Internal Circuit Connection	Copper Ribbon
Frame	Silver (more than 15 micron) Anodized Aluminium
Cells Encapsulant	EVA (Ethylene Vinyl Acetate)-FC/UFC
Junction Box (Model Type & current Rating)	IP68 Split JB
Connectors	MC4 Compatible
Mechanical Load Condition	Sustain heavy Wind & Snow loads (2400Pa & 5400Pa or 550kg/m2 Maximum diameter of 24mm with hail impact of 83
Cable Length	0.4 Meter

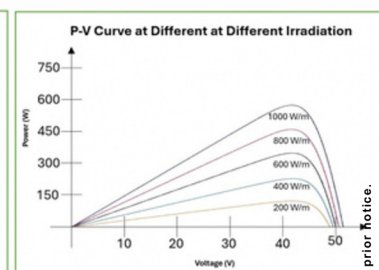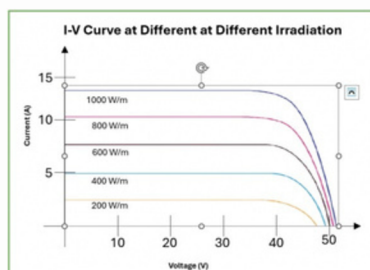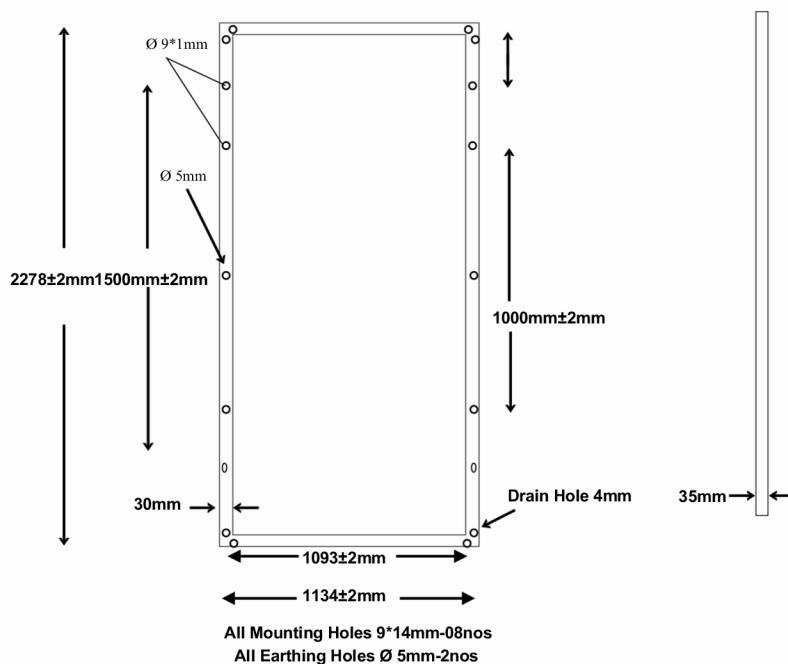

Bi-Facial output - (Back side gain @ STC)		585
15%	Nominal Maximum Power (Pmax) Wp	672.75
	Module efficiency %	26.04
20%	Nominal Maximum Power (Pmax) Wp	702.00
	Module efficiency %	27.18
25%	Nominal Maximum Power (Pmax) Wp	731.25
	Module efficiency %	28.31

Linear Performance Warranty

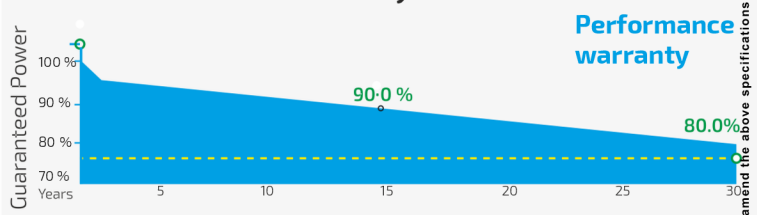

Product Certifications

IS 14286:2010/IEC 61215:2005 | IS/IEC 61730(Part I):2004 | IS/IEC 61732(Part II):2004 | IS 61701